


100 Series

103-10

Diesel Engine –
Industrial Open Power Unit

17.5 kW / 23.5 bhp

The 103-10 is built to exceed today's demanding market needs. Class leading performance, reliability and durability, mean cost-effective power – whatever the application. One of the cleanest and quietest engines in its power range, the 103-10 meets all known current and planned off-highway emissions legislation – worldwide.

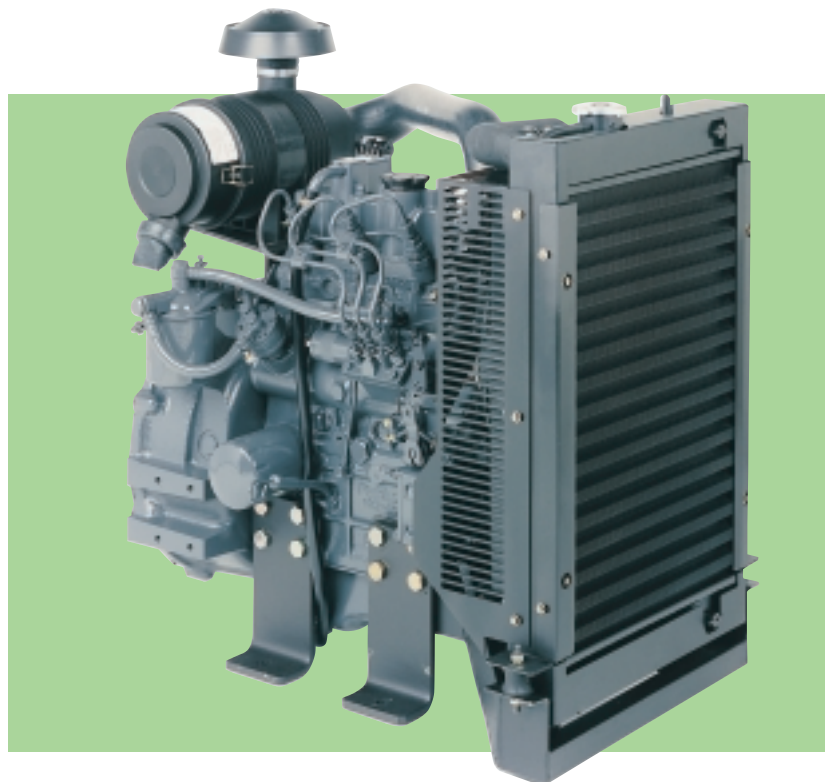

Technologically advanced

- Cassette type fuel injection pump – for reduced noise
- Forged chrome molybdenum steel crankshaft – for high strength
- Plateau honed cylinder bores – for superior oil control
- Three piece helically cut timing gears – for lower weight and noise
- Tunnel block design – for high strength and low noise

Powerful Solutions

- With the Perkins 100 Series, less quite literally means more – less weight, less servicing, lower emissions, lower fuel consumption and a smaller package size. For machine designers, this means fewer

design constraints and the ability to translate ambitious machine concepts into reality.

Clean Emissions

- **Highly efficient combustion** is achieved through our indirect fuel injection system, with optimised pre-combustion swirl chambers. This same efficiency makes the 100 Series capable of exceeding all known applicable off-highway emissions standards worldwide.

Designed to Fit


- **Providing a comprehensive commercial solution to our customer's needs** in terms of lead time and cost stability has led to the expansion of manufacture to Europe.

- The purpose built facility in Peterborough sets new standards in engine production efficiency. The broadened manufacturing base enables a faster and innovative response to changing market requirements.


Refined Performance

- **Inherently quiet**, the water-cooled multi-cylinder, IDI 100 Series provides far more than just class-leading noise levels. Features such as the exceptionally rigid crankshaft assembly, the helical three gear timing train and the integral fuel injection pump, combine to produce low vibration and sound frequency. This tuning of the entire engine, simplifies installations thereby reducing cost, while maximising operating comfort and efficiency.

Performance Data	2800 rpm				3600 rpm			
	Gross Intermittent (SAE J1995)	Speed rev/min	Net Intermittent (DIN 6271)	Speed rev/min	Gross Intermittent (SAE J1995)	Speed rev/min	Net Intermittent (DIN 6271)	Speed rev/min
Power Output (kW)	15.1	2800	14.2	2800	17.5	3600	15.8	3600
Power Output (bhp)	20.3	2800	19.0	2800	23.5	3600	21.2	3600
Peak Torque (Nm)	57.9	2000	55.7	2000	53.0	2400	50.7	2400
Peak Torque (lbf/ft)	42.7	2000	41.1	2000	39.1	2400	37.4	2400

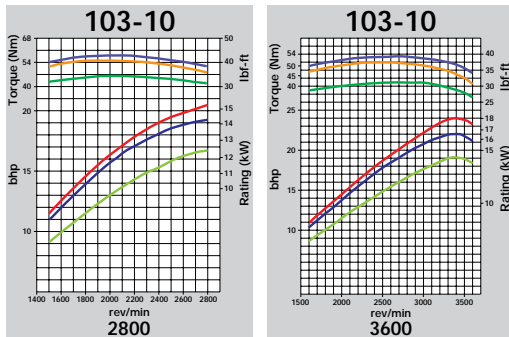

Gross Intermittent
– SAE J1995
Net Intermittent
– DIN 6271
Net Continuous
– DIN 6271

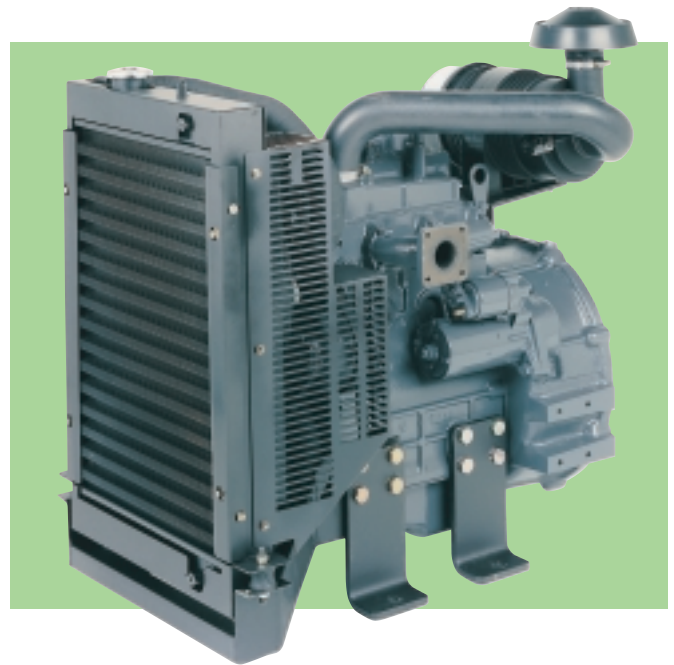

KEY

- Gross Intermittent Torque
- Net Intermittent Torque
- Net Continuous Torque
- Gross Intermittent Power
- Net Intermittent Power
- Net Continuous Power

Standard Specification


- Flywheel Housings – SAE 5 Short
– SAE 5 Long
- Flywheel – SAE 6½ Light
– SAE 6½ Heavy
- Starter Motor, 12 volt, 1.1 kW
- Lub oil sump, side and bottom drain
- Lub oil filler, top cover
- Lub oil filter, spin on type
- Dipstick, short type
- Front end drive pulley complete with PTO fixing holes
- Coolant pump
- Puller fan 330 mm diameter
- Alternator, 12 volt, 15 amp
- Induction manifold, top inlet
- Exhaust manifold, side outlet
- Fuel filter, spin on type
- Fuel lift pump, mechanical
- Glow plug starting aids
- ESOS (electrical shut off solenoid), energised to run
- Lub oil pressure switch
- Coolant temperature switch
- Provision for 3rd PTO
- Radiator and piping
- Radiator screen
- Fan guard
- Engine mountings
- Air Filter
- Mounting feet
- Hoses and brackets

Optional Equipment

- Exhaust silencer (Available Quarter 1 1999)
- Control panel (Available Quarter 1 1999)
- Workshop manual
- Parts book

General Data

Bore/Stroke	75mm x 72mm
Number of cylinders	3 in-line vertical
Cubic Capacity	954cc
Cycle	4-stroke
Aspiration	Natural
Combustion System	Indirect Injection with cassette type injection pump
Compression Ratio	23:1
Firing Order	1,2,3
Rotation	Clockwise, viewed from the front
Governing	Mechanical – all speed
Cooling	Liquid
Total weight (dry)	127 kg

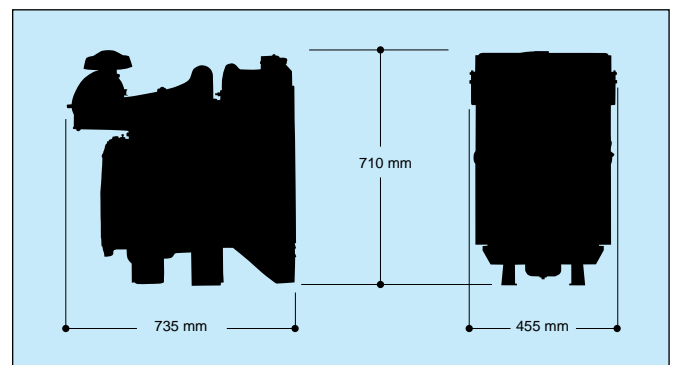

Perkins Engines Company Limited

Peterborough PE1 5NA UK
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240
www.perkins-engines.com

All information in this document is substantially correct at the time of printing but may be altered subsequently by the company.

Distributed by: